



POSSAFE
SOLIDLY RELIABLE

Possafe KT-700 Kiosk Okuyucu




1D/2D
Okuma



USB



Yüksek
Performans

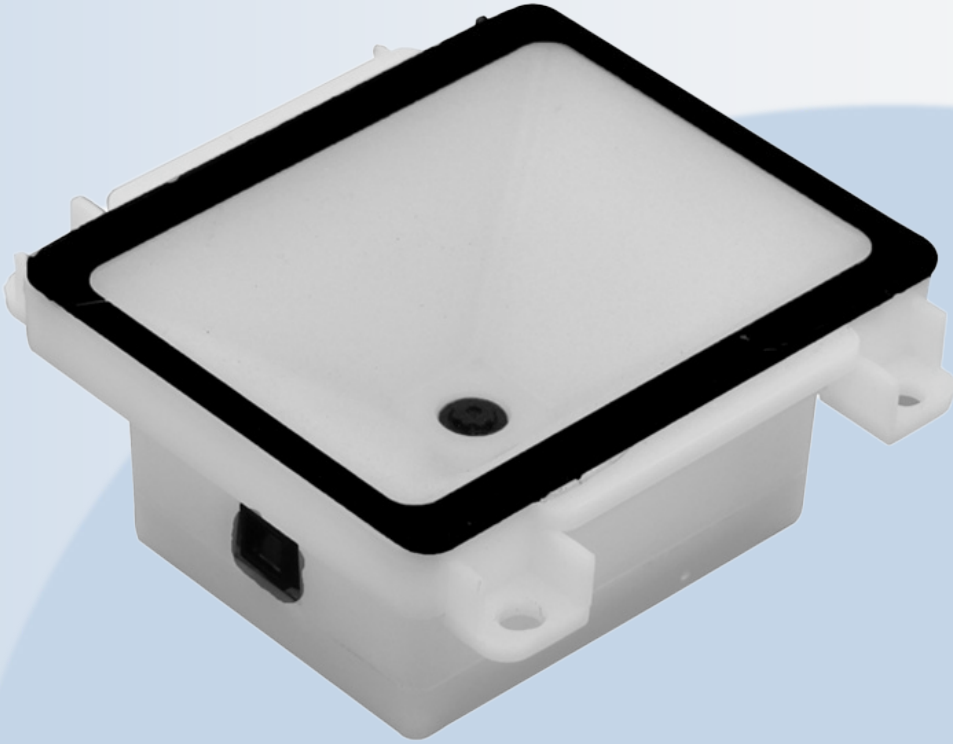

CE  RoHS FC
2002/95/EC

TEKNİK ÖZELLİKLER

Desteklenen Barkod Türleri	1D: Codabar, Code93, Code93, NEC 2 of 5, Code32 Pharmceutical(PARAF), Codell, Interleaved 2 of 5, Straight 2 of 5 Industrial, Straight 2 of 5 IATA, Matrix 2 of 5, Code 128, GSI-128, UPC-A, UPC-E, MSI, EAN/JAN-8, EAN/JAN-13, GSI DataBar Omnidirectional, GSI DataBar Limited, GSI DataBar Expanded, China Post (HongKong 2 of 5), Kroea Post 2D: PDF417, QR Code, MicroPDF417, Australian Post, Canada Post, Japan Post, MaxiCode, Codablock, Aztec, Dutch Post, Data Matrix, etc.
Çözünürlük	640(H) X 480 (V) Pixel CMOS
Mesafe	Code39 (5mill 0-7mm / QR (20mil) 0-11 mm / Code39 (13mill 0-17mm)
Görüş Alanı	39°(H) X 29°(V)
Görüş Açısı	Döndürme 360° / Eğim ±66° / Aralık ±66°

Min. Tanıma	> 4 mil	Baskı Kontrastı	%20
Hareket Toleransı	>40 cm / s	Arayüz	USB
Materyal	BS + PC	Kablo	2 M – Düz
Gerilim	DC 5V, 0.5A	Akım	235 mA
Çalışma Akımı	315mA	Başlama Akımı	320 mA
Çalışma Ortamı	Sıcaklık -20°C ~ 60°C	Nem %5~95 (yoğuşmasız)	
Depolama Ortamı	Sıcaklık -30°C ~ 70°C		
Düşme Şok Direnci	1,2 metreden betona birden fazla düşmeye karşı dayanıklıdır.		
Boyutlar / Ağırlık	137.4 x 99.8 x 96.5 mm	262.5 gr	



* Yukarıdaki parametreler önceden bildirilmeksizin değiştirilebilir.